




Stainless steel "Norma" clamp



Flexible connection hose – black with ribs 32mm



Elbow, M & F 32mm



Ball Valve with lever handle



Nipple, male x male thread




Tee, 3 female threads



Nut & Tail - joins flexible hose to threaded fittings



Tank Flange Fittings – SFTFT32

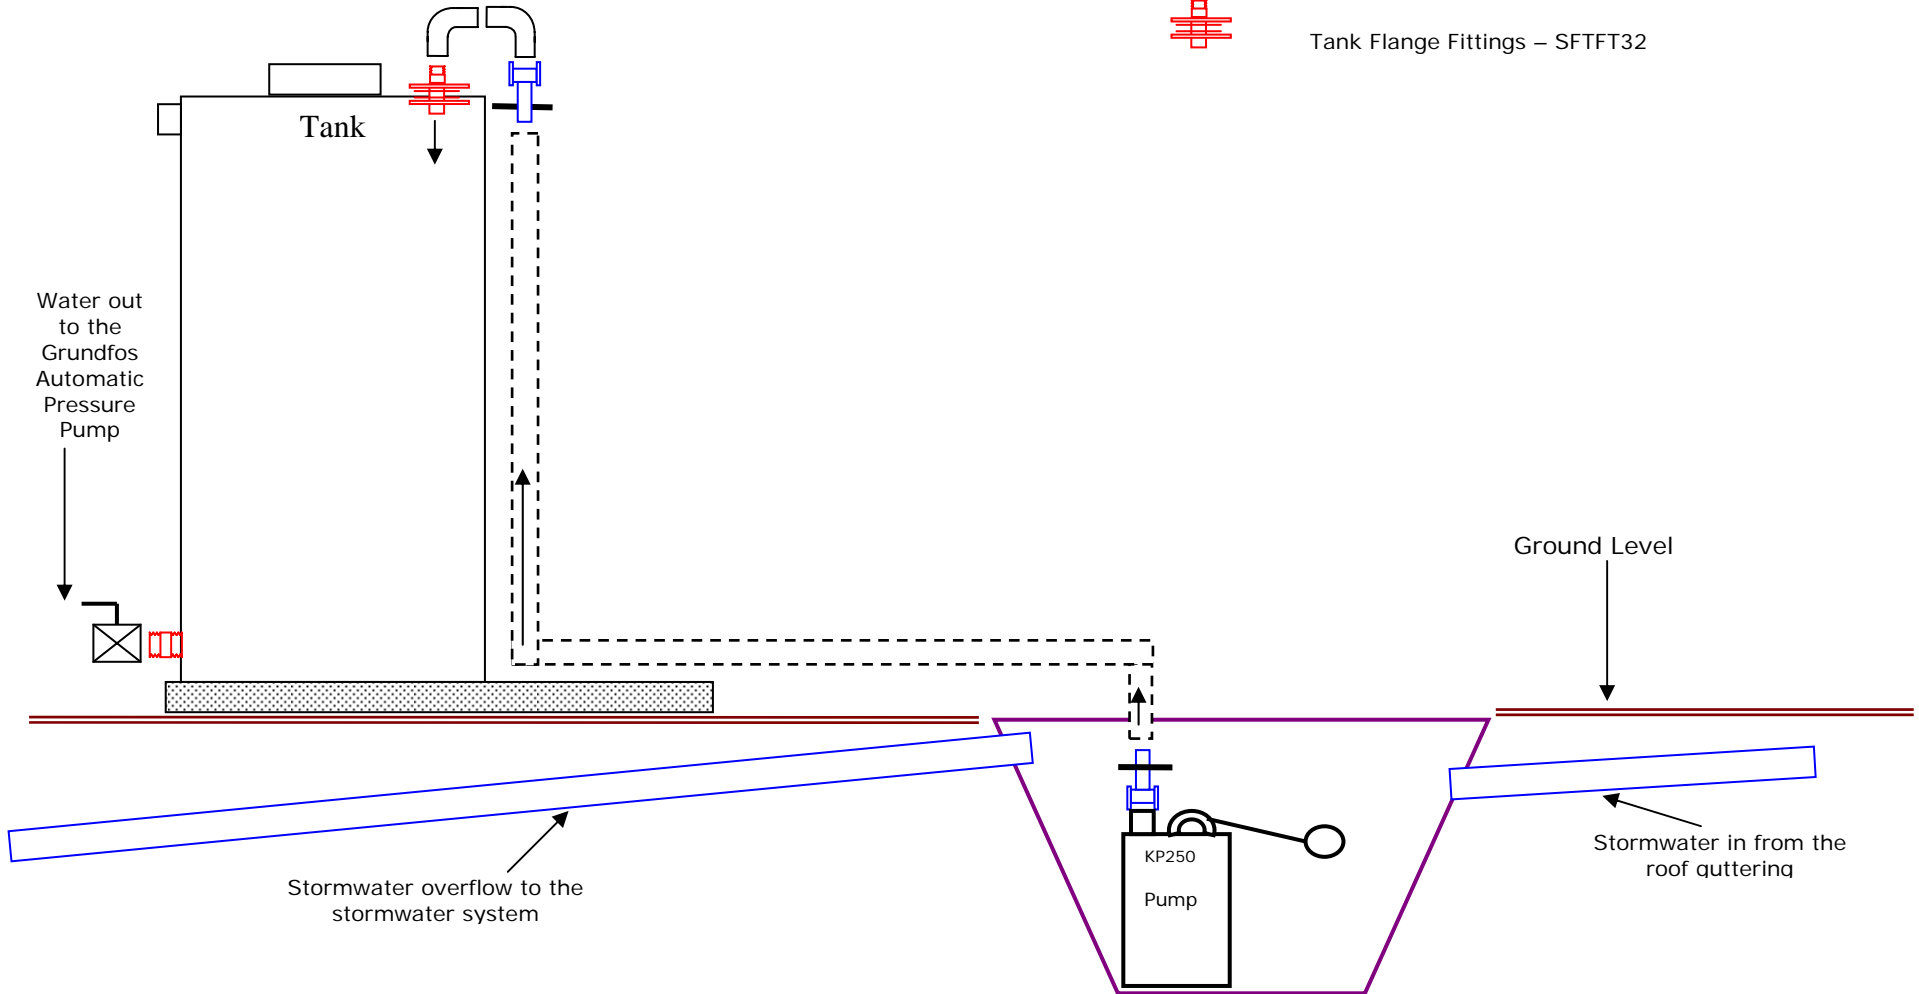

Plastic stormwater pit with minimum dimensions of 450mm x 450mm x 450mm – larger is better. Pit has cutouts for 90mm stormwater pipe and has a metal grate on the top which can be removed